

MG MIGHTY COVER™

Description

Rockwool is inorganic spun fibres made from natural rocks and minerals bonded by organic binder.

Rockwool is non-combustible, suitable for thermal insulation, fire protection and sound absorption/noise reduction.

MG MIGHTY COVER is pre-formed sectional pipe insulation. Snap-on type having split is supplied



*MG MIGHTY COVER is a trademark of Nichias Corporation

Standard Densities and Sizes

Product Name	Nominal Density (kg/m³)	Standard Thickness (mm)	Standard Size (mm)
MG MIGHTY COVER	90-150	25, 30, 40 50, 65, 75 and 100	1000

* Other densities and sizes are also available on request. For details, please contact us.

Nominal Pipe Size (ANSI)

NSP(inch)	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	3-1/2	4	5	6	8	10
ID(mm)	22	27	34	43	49	61	76	89	102	114	140	168	219	274
NSP(inch)	12	14	16	18	20	22	24	26	28	30	32	34	38	
ID(mm)	324	356	406	457	508	559	610	660	711	762	813	661	914	

* Available thickness are not for all sizes, please contact before ordering.

Maximum Service Temperature and Classification

Product Name	Nominal Density (kg/m³)	Max. Service Temperature (°C)	Test Method
MG MIGHTY COVER	90-150	650	ASTM C411

* Based on MG BOARD Data.

Apparent Thermal Conductivities

Product Name	Apparant Thermal Conductivities (W/mK)		Test Method
MG MIGHTY COVER	Mean Temperature (°C)	Average 70 ^{+5/-0}	0.044 max. (Conform to JIS A9504 requirement)
			JIS A112 ISO 8302

* These figures are actual test results and shall not be used for specification purposes.

* Based on MG BOARD Data.

MG MIGHTY COVER™

■ Technical Properties

Items	Unit	Test Results*	Spec.	Test Method
Linear Shrinkage at 650°C	%	1.22	2.0 max.	ASTM C356
Surface burning characteristic	Index	Flame spread 0	25 max.	ASTM E84
	Index	Smoke development 0	50 max.	
Water vapour absorption	%	0.29	5.0 max.	ASTM C1104
Water absorption	kg/m ²	0.034	-	EN 1609
Non fibrous (Shot) content	%	150µm 13.0	-	ASTM C1335
		5000µm 1.6	4 max.	JIS A9504
Corrosive resistance	-	Passed 28 day preproduction corrosion test		ASTM C795


* Based on MG BOARD 080 Data

■ Conforming Specification

- ASTM C547 Standard Specification for Mineral Fibre Pipe Insulation
- JIS A 9504 Man-Made Mineral Fibre Thermal Insulation Materials
Rockwool Pipe Insulation (Density : 40~200kg/m³)

■ Handling & Storage

- Handle carefully, avoid damages on the edge and surfaces of product
- Store indoors and protect from direct exposure to the water

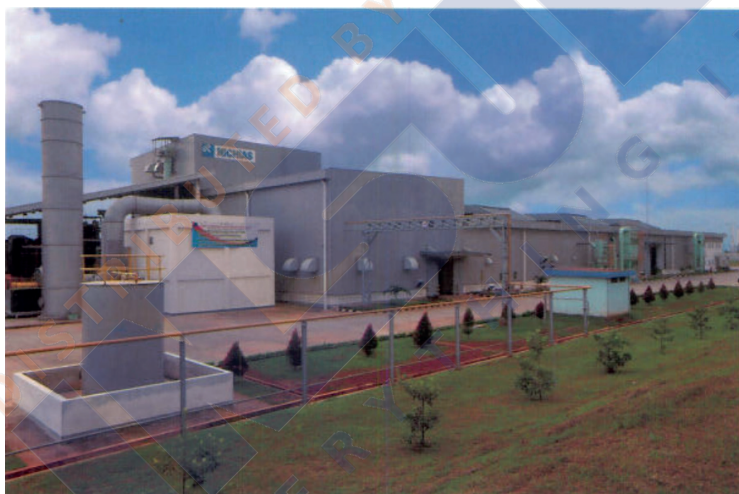

This product does not contain any asbestos fibres nor Freon such as CFCs, HFCs, SCFs, HCFs which will affect the environment.

■ Manufacturer

PT. NICHIAS ROCKWOOL INDONESIA

Jl. Jend. A. Yani, PO Box 1, Cikampek,
Jawa Barat, Indonesia

■ Sole Distributor in Indonesia

PT. NICHIAS SUNIJAYA

Panin Life Centre, 2nd Floor, Room 205
Jl. Letnan Jenderal S. Parman Kav. 91,
Jakarta 11420, Indonesia
Tel : 62-21-56956207
Fax : 62-21-56956208 / 9

Precautions for handling products	Caution
<p>Please observe the following cautions in order to maintain the intrinsic functions of the product and also to ensure that these products are used safely.</p> <ol style="list-style-type: none"> 1. Do not use a product for any other than the purpose described in the catalog and specification. 2. Store products indoor at ordinary temperature and humidity, and strictly avoid getting it wet. 3. Store horizontally on pallets. 4. Do not store under heavy goods. 5. Avoid sparks of welding. 6. Handle without using a hook. 7. Check the precautions for occupational health using the SDS. <p>Since this product contains rockwool, please observe the following cautions.</p>	<ol style="list-style-type: none"> 1. Manual tools such as a knife shall be used for cutting. For use of electric cutting machine, located exhaust ventilation and dust-prevention equipment shall be installed. 2. Wear respirator for handling. 3. Wear work clothing with long sleeves and protective gloves as well. Where necessary, wear protective goggles. 4. Use ventilation system to avoid hazardous gas may be generated in the initial heating-up process. 5. For disposal, follow local regulations.